


VITALink®

14 AWG 3-Pair Armored Circuit Integrity Cable

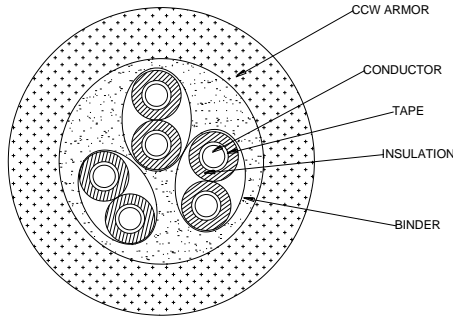

1. Construction:

- 1.1. Conductors: 14 AWG (2.1 mm²) Solid Bare Copper, 0.064" (1.62 mm) Nominal Diameter
- 1.2. Tape: Heat Resistant Tape, 50% Nominal Overlap
- 1.3. Insulation: Low Smoke Zero Halogen Thermoset Fire-Roc® Insulation, 0.142" (3.60 mm) Nominal Diameter
- 1.4. Color Code: Red & Black Pairs
- 1.5. Cable Assembly: Cable (3) Pairs
- 1.6. Binder: White Fire-Roc Binder, 0.538" (13.6 mm) Nominal Diameter
- 1.7. Armor: Continuously Corrugated Welded Copper, 0.880" (22.3 mm) Nominal Diameter

1.8. Jacket Print:

COMTRAN LSZH VITALink® FPLR-ST1 CL3R-ST1 3PR (6/C) 14AWG 105C FT4 SUN RES WET or FAS105 FT4 ST1 LL-14444 FRR-2HR FHIT.40B/FHIT7.40B UL2196/ULC S139 MAX VOLTAGE 72V PN 36518 (MMYY) (01-12345)

NOTE: MMY is 4 Digit Month/Year (01-12345) Traceability Code

2. Compliance:



- 2.1. (UL) Listed Type FPLR-ST1
- 2.2. (UL) Listed CL3R-ST1
- 2.3. CSA Listed FAS105 ST1 FT4
- 2.4. UL Subject 1424 Power Limited Fire Alarm Circuits; 300V/105°C Classified
- 2.5. UL Subject 13 Power Limited Circuit Cables; 300V/105°C Classified
- 2.6. ANSI/UL 2196 2-Hour Fire Rating for use in FHIT System 40B
- 2.7. CAN/ULC-S139 2-Hour Fire Rating with Hose Stream for use in FHIT7 System 40B
- 2.8. NFPA 70 & 72
- 2.9. California State Fire Marshal Approved
- 2.10. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Nominal Conductor DCR @ 68F: 2.57Ω

4. Physical Characteristics:

- 4.1. Nominal Weight per 1000 FT: 506 Lbs. (229 kg)
- 4.2. Min Bend Radius: 6.1" (155 mm)
- 4.3. Maximum Pull Tension – 197 Lbs. /Ft. (89.3 kg / Ft.)

TITLE:		DESCRIPTION:		COMTRAN 330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		 COMTRAN <small>Innovative Systems. Engineered Solutions.</small>  <small>A Marmon Wire & Cable/Berkshire Hathaway Company</small>
DS36518		14 AWG 3 Pair Armored VITALink® Circuit Integrity Cable				
Rev	Date	Detail		Eng.	App.	
5	6/10/20	Update to print		PB	KB	ECN 20-050
4	11/25/19	Remove sequential footage from print		PB	KB	ECN 19-114
3	07/23/19	Update print legend per UL requirements		PB	WC	ECN 19-075
2	01/29/19	Change logo and basic corrections		SM	PB	
1	10/3/18	Initial Drawing		PB	WC	

Comtran reserves the right to change the information above without prior notification. Comtran assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document